

DEVELOPING AN ANOMALY SOFTWARE AGENT COLLUSIVE PIRACY PREVENTION SCHEME IN MULTIHOP WIRELESS NETWORKS

*B.Lakshmi Triveni and B.Babu**

Student, CSE, CIET, Lam, Guntur, India

**Assistant Professor, CSE, CIET, Lam, Guntur, India*

Abstract- Wireless Multimedia Sensor Networks (WMSN) is also an important study in Wireless sensor networks. Due to its minimized accessibility power in CMOS gadgets, it offers better transmission power. In some scenarios, the information presented in the video may get distorted. To overcome this issue, we make an attempt to study about the leakage resiliency framework and distortion resistant scheme using multihop wireless networks. We develop an anomaly software agent system to update and recognize the malfunctioning system. The agent is the mobile agent. With the aid of mobile agents, the nodes are configured, reduced computation complexity and creating report for the leakage nodes. The mobile agent is the video applications. Hence the basic idea is to propose an enhanced dynamic content leakage detection scheme that is robust to the variation of the video lengths. It enhances the detection performances even in the environment subjected to variation in length of videos.

Keywords: Wireless Multimedia Sensor Networks, Single path communication, Distortion, information leakage and content delivery.

I. INTRODUCTION

As of late, the eminency of real-time video and streaming application; these administrations over the web have been expanded. The real time video application such as: YouTube, Microsoft Network Videos. The vast majority don't perused as much as they used to, and when they do read, they tend to skim-read, which implies the significance of composed duplicate can be lost or misinterpreted [7]. With a plenitude of content pushed to the purchasers and representatives consistently, so a well- designed

video depicts a brand new innovation to the business requirements. The intrigued demand on the video is due to three reasons: Cost-effectiveness, increased productivity and consistency. The primary employments of videos [9] incorporate Training and Tutorial, where corporate video first picked up with training (administration, support, deals, self-awareness and so forth.) and keeps on being one of the best employments of video servicing. Online Video is a savvy substitute for the training classes. It can likewise effectively coordinate video into online management tools.

In Subsequent to WMSNs have some unmistakable contrasts from the customary data sensor organization, the sensor system must be reexamined, so we can convey mixed media content with a specific level of Quality of Service (QoS). The information era rate of a video sensor is entirely high, bringing about much higher system data transfer capacity prerequisites and power utilization. This issue is particularly bothered when no proficient compression scheme is utilized. Accordingly, the transmission of immense measures of mixed media information, especially video information, over data transmission obliged sensor systems is a major challenge. Subsequent to the need to minimize the energy utilization has driven the vast majority of the examination in the sensor node organization, systems to productively convey application-level QoS, and to delineate prerequisites to the network-layer measurements. As WMSNs are imagined to have no extra assets other than the incorporation of interactive media sensors, new methodologies should be proposed.

The paper is organized into four parts. Section II describes the existing works done by the researchers. Section III describes our innovative solution to the challenges exists in video services. Section IV justifies the experimental results of the proposed approach. Atlast concluded in Section V.

II. RELATED WORK

A plenty of proposals from the researchers with respect to the encoding and transmission of video shows the essentialness of video interchanges. Diverse methodologies exist in taking care of such an encoding and transmission. The Multiple Description Coding (MDC) procedure segments the introductory video clipping into various substreams called depictions. The depictions are transmitted on the system in the disjoint ways. These depictions proportionate in the network as in any of them is adequate for the unraveling procedure to be effective, however the quality enhances with the quantity of decoded substreams. Layered Coding (LC) produces a base layer and many enhanced layers. The upgrade layers serve just to refine the base-layer quality and are not valuable on their own. Consequently, the base layer denotes the most basic part of the encoded signal [5], [6]. Shared assets, otherwise called system assets, called as the computer data, information or other hardware devices that can be localized through a Local Area Networks (LAN). The most often utilized shared system environment objects are documents, information, media and equipment assets like printers, fax machines and scanners [10].

The videos with tricky theft are the principle of licensed innovation within the boundary of P2P networks. Paid customers might wrongfully share copyrighted content records with unpaid customers (privateers). Such online theft has ruined the utilization of open P2P systems for business content delivery. It proposes a proactive content harming plan to stop colluders also, privateers from asserted copyright encroachments in P2P document sharing. To unravel the issues of content spillage, spillage identification plan have been presented. It explores the execution of the proposed technique under a trusted system environment with the videos of various lengths. Video spilling application [3] manages a few P2P system is utilized to manufacture the live and online video spilling administrations on the web at the low cost. In order to detect illegal content streaming by using traffic pattern which are constructed from the amount of traffic routers. The burst errors and random errors are solved in content streaming. It prevent content leakage from user's

side. However, delay occurs due to large length of videos [4].

As an extensible flagging convention, SIP (Session Initiation Protocol) can be connected in creating video conference arrangement of conference server and the accessibility of data transmission. It concentrates on the best way to continue conferencing when the quantity of conferencing clients gets incremented. It gives an adaptable administration model to SIP-based video meeting. The principle impediment is Fetched Expensive and Low resolution [5]. The Delay-Constrained High-Throughput Protocol for Multipath Transmission (DCHT) [12] is the changed version of Directed Diffusion [13] that propounds the thought of utilizing the multipath directing way to deal with the video spilling in low-control WSN. DCHT presents a novel support technique and utilizations a directing cost capacity.

The Energy-Efficient Protocol and the QoS-based Multipath Routing Protocol (EQSR) [14] are one of the proposed protocols intended to fulfill the unwavering quality and deferral necessities of constant applications. EQSR enhances the unwavering quality a lightweight Forward Error Correction (FEC) instrument that presents information repetition in the information transmission process. However, it forces high control overhead. Maximally Radio-Disjoint Multipath Routing (MR2) [15] uses a versatile incremental system to develop the minimum disrupting paths that fulfill the transmission capacity necessities of interactive media applications. In [16], the creators have exhibited the MPMPS plan in the vehicle layer, which is based on the TPGF multipath routing protocols [17]. MPMPS underpins various needs and picks the most extreme number of ways to amplify the throughput of the streaming information transmission. In any case, this hub disjoint plan results in a solitary purpose of disappointment. A comparative methodology has been given in [18] by the name of MCMP (Multi-Channel Multi-Path) plan.

III. ENHANCED DYNAMIC DISTORTION RESISTANT SCHEME

In this section, we explained the working of the proposed architecture. The proposed algorithm is organized into five modules. The modules were described as:

- Video Leakage Setting

- Leakage detection measures
- Pattern generation
- Pattern matching
- Leakage detection criterion

a) Video Leakage Setting

Because of the prominence of spilling conveyance of motion pictures, improvement of P2P streaming programming has grabbed much attention. These advances improve the dispersion of any kind of data over the Internet. Initial, a normal client in a protected system gets streaming content from a content server. At that point, with the utilization of a P2P spilling programming, the normal yet vindictive client redistributes the spilling content to non standard clients. Content spillage is not really recognized or blocked by watermarking and DRM-based strategies.

b) Leakage Detection Measures

In video streaming system, the progressions of the measure of traffic show up as a remarkable waveform particular to the content. Along these lines by observing this data recovered at various hubs in the system, content-spillage can be recognized. The topology comprises of two fundamental segments, specifically the traffic design era motor installed in every switch, and the traffic design coordinating the engine executed in the administration server. In the interim, the activity design coordinating motor registers the closeness between movement designs through a coordinating process, and in light of particular model, distinguishes content spillage.

c) Pattern Generation

Then we depict the traffic design era process performed in the routine techniques. Traffic design era procedure depends on an either time- slot based estimation or a packet size-based algorithm. Time slot based estimation is a clear answer for creating traffic designs by summing the measure of traffic handling amid a certain timeframe, Δt . On the off chance that a few bundles are deferred, they might be put away over the accompanying opening, x_{i+1} , rather than the essential opening, x_i . Accordingly, delay and jitter of bundles twists the traffic design, and as a result, diminishes the precision in the pattern matching. Additionally, time slot based estimation is influenced by packet loss.

d) Pattern Matching

In pattern acknowledgment, the level of likeness is characterized to be the likeness measure

between the patterns. The server side traffic designs speak to the original traffic design. The major strategy is to measure the closeness of system traffic pattern called cross-relationship coordinating estimation, comprise of processing the cross-relationship coefficient, which is utilized as a metric of likeness between the different traffic designs. Another design coordinating estimation is the Dynamic Programming (DP) coordinating taking into account the DP system.

e) Leakage Detection Criterion

The cross-relationship coordinating estimation is performed on both the activity designs produced through time-space based calculation and those created through parcel size-based calculation. The comparability information received from the coordinating of time space based created traffic pattern are extensively smaller and their appropriation is thought to be typically circulated around zero, subsequent to the dispersion of cross-relationship coefficient estimations of two arbitrary waveforms is approximated to the normal distribution. Then again, the DP coordinating estimation is performed on activity designs produced through parcel size based estimation. Accordingly, a predefined quality is utilized as the choice limit. Regardless, a fixed choice limit is chosen by contrasting the separation registered through DP coordinating with the choice limit, i.e., the separation not exactly the edge demonstrates that the thought about the similar traffic patterns. If we need to retransmit the parcel that is lost, we need to proceed with the yes alternative, and then the chart begins representation of video streaming. If we say no, the spilling gets ceased there by itself. The proposed architecture is given below:

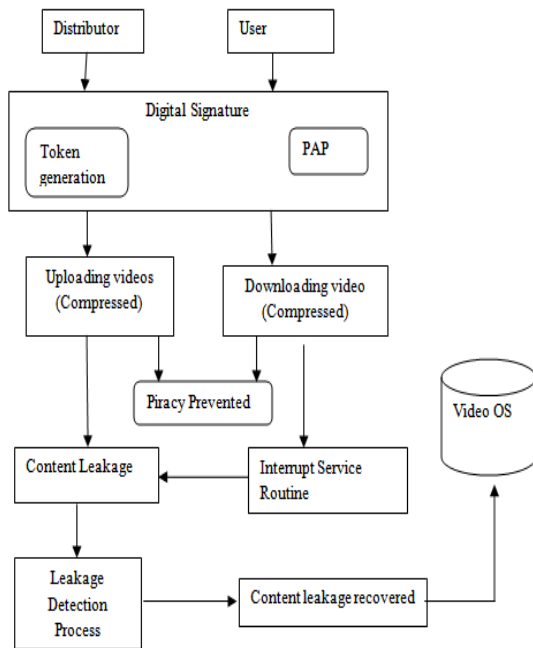


Fig.1. Working flow of proposed approach.

IV. EXPERIMENTAL RESULTS

The performance metrics studied were the Packet Delay, Network Lifetime and Throughput aware packet scheduling.

a) Packet Delay:

Packet Delay exists when the system is not congested, minimum delay is accomplished by sending the parcel to the hub nearest to the destination. In any case, as the traffic structure changes, sending parcels to destination results in expanded blockage and more traffic delay happens. Anyhow, the proposed estimation chooses the way contingent upon the application, along these lines adjusting the data transfer capacity in the system. This adjusting assists the hot locales in the system furthermore, decreases the deferral for parcels going through the district i.e. for heavy activity. And thus, the proposed scheme gives enhanced execution.

b) Network Lifetime:

Network lifetime is the time range from the organization to the moment when the system is considered as the nonfunctional. The weight of every sensor is contrarily proportional to the observed noise fluctuation, which is significant subsequent to the information from sensors with smaller noise difference is more helpful.

c) Throughput aware Packet Scheduling:

It can anticipate whether a sensor hub will have the capacity to get and transmit every one of the packets that will experience it in the following transmission window without expending all its energy and utilizing greatest data transfer capacity. So the proposed scheme can control the life range of the sensor system by evaluating the remaining data transfer capacity productivity of every node in all the selected routes. The evaluation of the proposed approach is presented below in design view.

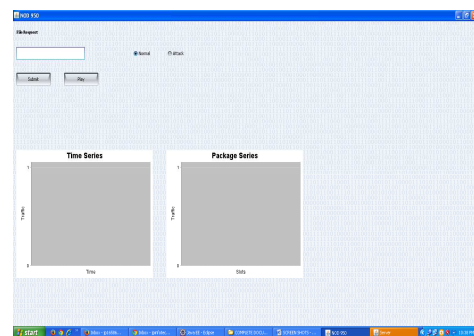


Fig.2. Working of nodes in normal modes

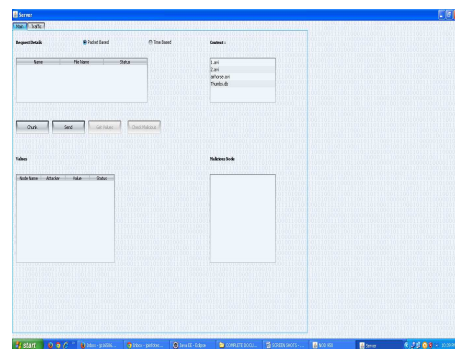


Fig.3. Server with the list of Files



Fig.4. Traffic signal generated from the servers

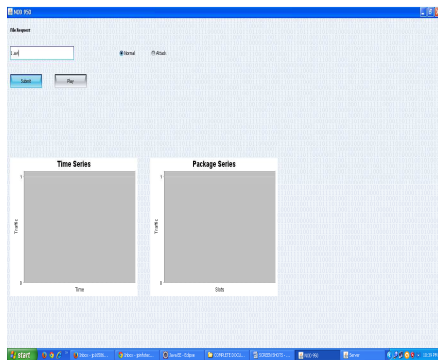


Fig. 5. Node Requesting the server for video file

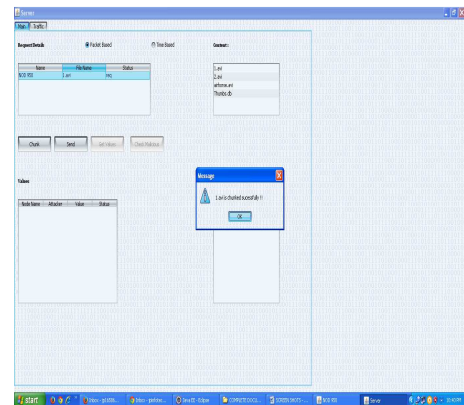


Fig.8. Chunk and send video file

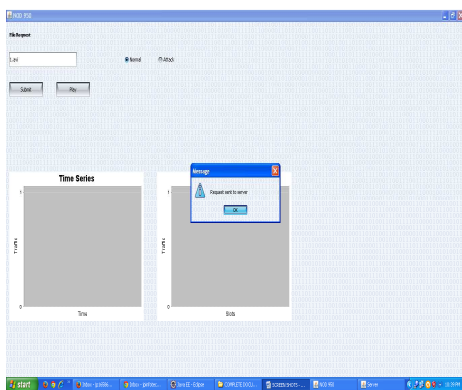


Fig.6. Request to the server

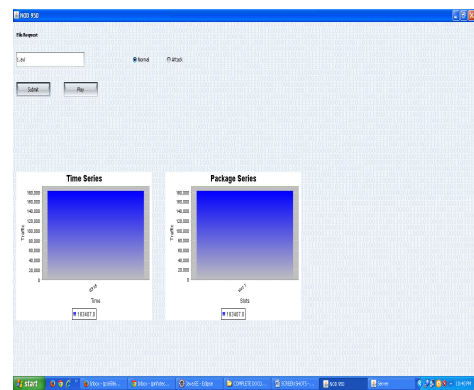


Fig.9. Calculating the time series and packet series of the video applications

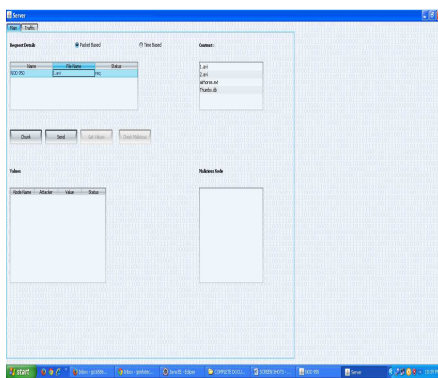


Fig.7. Request list from the node

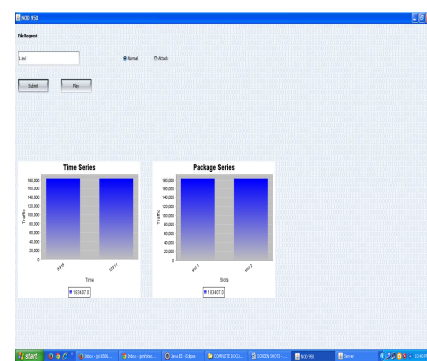


Fig.10. calculating the receiving the time series and packet series in 1st part of video streaming

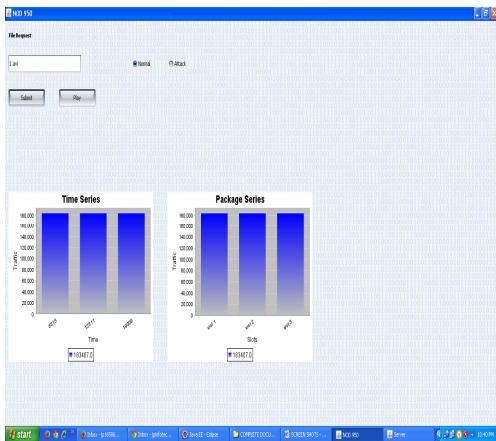


Fig.11. calculating the receiving the time series and packet series in 2nd part of video streaming

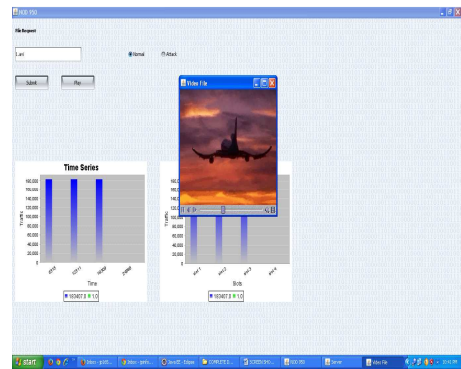


Fig.14. Playing the received video file.



Fig.12. successfully received all the video packets.

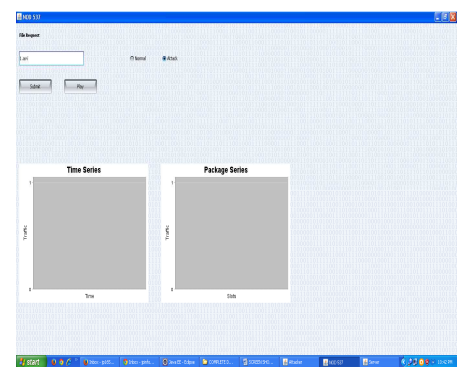


Fig.15. Node in attack mode

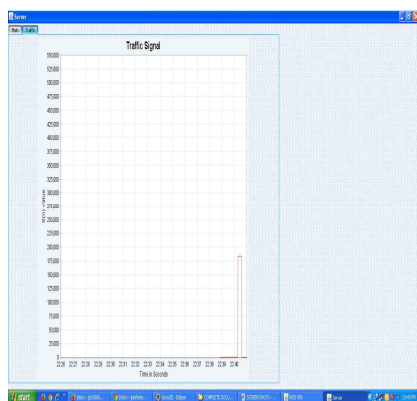


Fig.13. Estimating the traffic signal from server

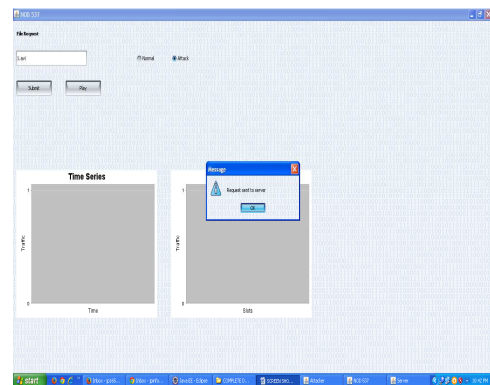


Fig.16. Requesting the server for video file

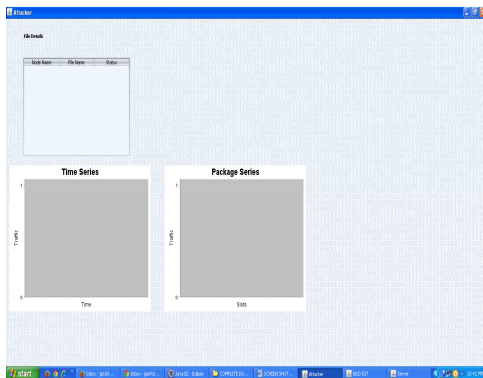


Fig.17. Working process of attacker node.

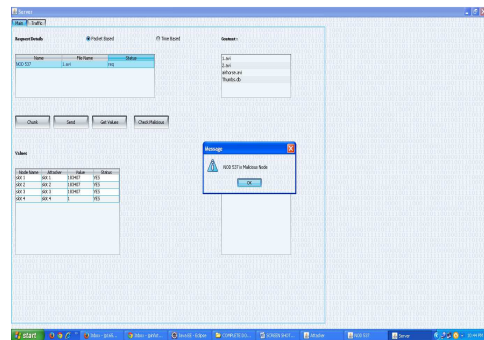


Fig.20. Acquiring the details of malicious nodes

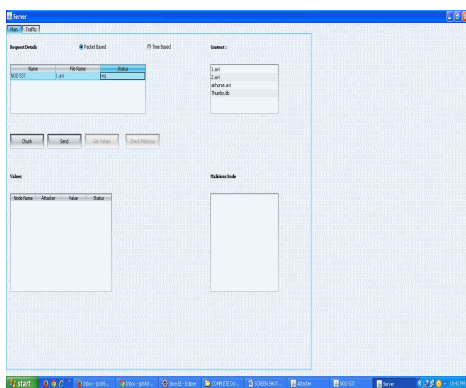


Fig.18. Server responding for the node request (chunk and send video file)



Fig.19. Receiving the video file based on time and packet series.

V. CONCLUSION

In this system, the video application is considered as the mobile agents. By enhancing the streaming performance, the piracy and content leakage of the video is predicted. A unique traffic pattern is obtained to protect the illegal distribution of data by the proper user. An end to end distortion framework is build over the packet loss probabilities. Using this model, we find the optimal route (in terms of distortion) between a source and a destination node using a dynamic programming approach. Moreover, the user experience degradation due to increased traffic load in the network is kept to a minimum.

REFERENCES

- [1] Xiaosong Lou, Kai Hwang, "Collusive Piracy Prevention in P2P Content Delivery Networks" IEEE Transaction on Computers, Vol 58, No. 7, July 2009.
- [2] Hiroki Nishiyama, Desmond Fomo, Zubair Md. Fadlullah, and NeiKato,"Traffic Pattern Based Content Leakage Detection for Trusted Content Delivery Networks," IEEE Transactions on Parallel and Distributed Systems, vol. 25, no. 2, pp. 301-309, Feb. 2014.
- [3] Y. Liu, Y. Guo, and C. Liang, "A survey on peer-to-peer video streaming systems," Peer-to-Peer Networking and Applications, Vol.1, No.1, pp.18-28, Mar. 2008.
- [4]M. Dobashi, H. Nakayama, N. Kato, Y. Nemoto, and A. Jamalipour, "Traitor Tracing Technology of Streaming Contents Delivery using Traffic Pattern in Wired/Wireless Environments," in Proc. IEEE Global Telecommunications Conference, pp.1-5, San Francisco, USA, Nov./Dec. 2006.
- [5]Z. Yang, H. Ma, and J. Zhang, "A dynamic scalable service model for SIP-based video conference," in Proc. 9th International Conference on Computer Supported Cooperative Work in DE.

- [6] O. Adeyinka, "Analysis of IPSec VPNs Performance in A Multimedia Environment," School of Computing and Technology, University of East London.
- [7] S. K. Das, A. Mukherjee, S. Bandyopadhyay, K. Paul, and D. Saha, "Improving quality-of-service in ad hoc wireless networks with adaptive multi-path routing," in Proceedings of the IEEE Global Telecommunications Conference, San Francisco, CA, 2000, pp. 261-265.
- [8] X. Hou, D. Tipper, and J. Kabara, "Label-based multipath routing (LMR) in wireless sensor routing," in Proceedings of the 6th International Symposium on Advanced Radio Technologies, Boulder, CO, 2004.
- [9] Y. M. Lu and V. W. S. Wong, "An energy-efficient multipath routing protocol for wireless sensor networks," International Journal of Communication Systems, vol. 20, no. 7, pp. 747-766, 2007.
- [10] F. Wang, D. Wang, and J. C. Liu, "Traffic-aware relay node deployment for data collection in wireless sensor networks," in Proceedings of the 6th Annual IEEE Communications Society Conference on Sensor, Mesh and Ad Hoc Communications and Networks, Rome, Italy, 2009.
- [11] K. Lin, K. Q. Li, W. L. Xue, and Y. G. Bi, "A clustering hierarchy based on cellular topology for wireless sensor networks," Computer Systems Science and Engineering, vol. 24, no. 5, pp. 337-346, 2009.
- [12] S. Li, R. K. Neelisetti, C. Liu, and A. Lim, "Efficient multi-path protocol for wireless sensor networks," International Journal of Wireless & Mobile Networks, vol. 2, no. 1, pp. 110-130, 2010.
- [13] C. Intanagonwivat, R. Govindan, and D. Estrin, "Directed diffusion: a scalable and robust communication paradigm for sensor networks," in Proceedings of the 6th Annual International Conference on Mobile Computing and Networking, Boston, MA, 2000, pp. 56-67.
- [14] J. Ben-Othman and B. Yahya, "Energy efficient and QoS based routing protocol for wireless sensor networks," Journal of Parallel and Distributed Computing, vol. 70, no. 8, pp. 849-857, 2010.
- [15] M. Maimour, "Maximally radio-disjoint multipath routing for wireless multimedia sensor networks," in Proceedings of the 4th ACM Workshop on Wireless Multimedia Networking and Performance Modeling, Vancouver, Canada, 2008.
- [16] L. Zhang, M. Hauswirth, L. Shu, Z. Zhou, V. Reynolds, and G. Han, "Multi-priority multi-path selection for video streaming in wireless multimedia sensor networks," in Ubiquitous Intelligence and Computing: Proceedings of the 5th International Conference, Oslo, Norway, 2008 (Lecture Notes in Computer Science Vol. 5061), F. Sandnes, Y. Zhang, C. Rong, L. Yang, and J. Ma, Eds. Heidelberg, Germany: Springer Berlin, 2008, pp. 439-452.
- [17] L. Shu, Z. B. Zhou, M. Hauswirth, D. L. Phuoc, P. Yu, and L. Zhang, "Transmitting streaming data in wireless multimedia sensor networks with holes," in Proceedings of the 6th International Conference on Mobile and Ubiquitous Multimedia, Oulu, Finland, 2007, pp. 24-33.
- [18] S. M. A. Zaidi, J. Jung, B. Song, H. Lee, and H. Y. Youn, "Multi-channel multi-path video transmission over wireless sensor networks," in Proceedings of the IEEE Consumer Communications and Networking Conference, Las Vegas, NV, 2013.
- [19] C. E. Manning (1996). Why do we need compression? [Online]. Available: <http://www.newmediarepublic.com/dvideo/compression/adv03.html>
- [20] I. Richardson (2007). White paper: an overview of H.264 advanced video coding [Online]. Available: http://www.vcodex.com/files/H.264overview_Jan11.pdf
- [21] W. Wang, M. Hempel, D. Peng, H. Wang, H. Sharif, and H. H. Chen, "On energy efficient encryption for video streaming in wireless sensor networks," IEEE Transactions on Multimedia, vol. 12, no. 5, pp. 417-426, 2010.
- [22] George Papageorgiou, Member, IEEE, ACM, Shailendra Singh, Srikanth V. Krishnamurthy, Fellow, IEEE, Ramesh Govindan, Fellow, IEEE, and Tom La Porta, Fellow, IEEE, "A Distortion-Resistant Routing Framework for Video Traffic in Wireless Multihop Networks", IEEE/ACM Transactions On Networking, Vol. 23, No. 2, April 2015.